

 NEXEN CORPORATION



www.nexensolidtire.com



NEXEN INDUSTRIAL TIRES

 NEXEN CORPORATION

Global No.1

Nexen Prepares for Tomorrow

NEXEN IS


Since its founding in 1968, Nexen has established itself as a leader in the rubber industry through continuous efforts with a future-oriented management philosophy and unvarying commitment to its customers.

Industrial solid tires are recognized as the standard for solid tires through the excellent quality and delivery of completed forklifts, and automotive inner tubes are exported to over 140 countries, ranking No. 1 in global market share.

In addition, CMB, which is the fruit of rubber mixing technology, has been in the spotlight in numerous industrial fields, including automobiles, proving to be a technology leader. It is also standing comparison with global companies in the golf ball field.


Please watch Nexen's powerful leap to reward customers' interest and love and create a better future.

*Happy tomorrow for everyone!
Nexen, a global leading company
of comprehensive rubber products,
will create it.*

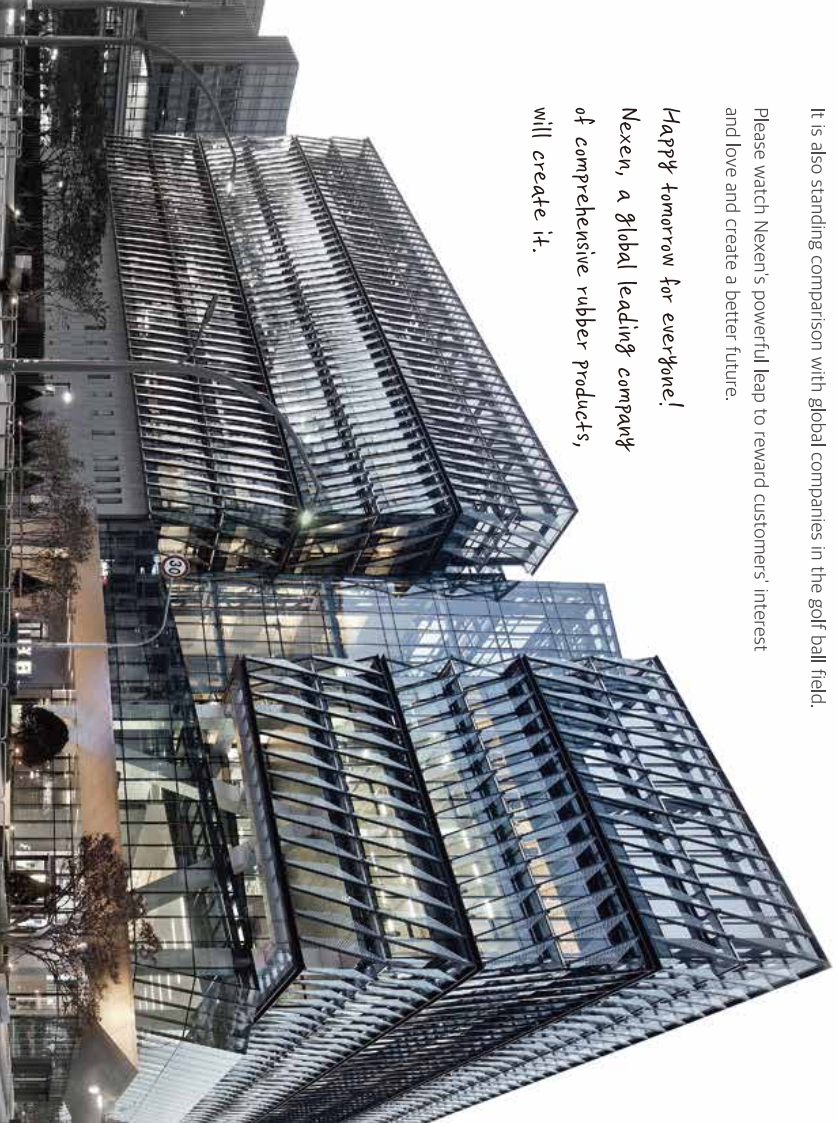

NEXEN GROUP

Nexen Group consists of 24 corporations, including 13 domestic corporations and 11 overseas corporations, including Nexen Co., Ltd., Nexen Tire Co., Ltd., KNN Co., Ltd., Nexen D&S Co., Ltd., and Nexen Wolseok Cultural Foundation. Nexen Co., Ltd., a business holding company, serves as the group's Control Tower.

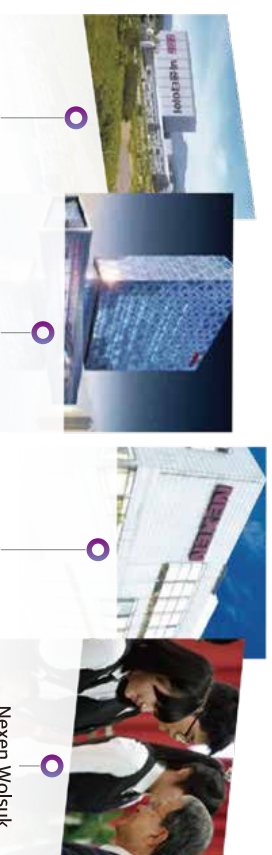

Nexen Tire

It is a Korean native company that has been manufacturing tires with know-how and technology accumulated over 70 years.

KNN

KNN, the representative broadcasting station in Busan and Gyeongnam, meets local viewers' needs for high-quality information with high-quality programs.

Nexen D&S

Nexen D&S increases sales by adjusting reasonable lease conditions, such as management of Seoul Nexen Gangnam Tower, and directly performs facility management service projects for other lease real estate.

Nexen Wolseok Cultural Foundation

Established in January 2008, it has contributed to the promotion of academics and the development of culture and arts in the local community, and has also strived to provide scholarships and help the underprivileged.

COMPANY HISTORY

2010 Leap forward global No. 1

- 2012 Launched SOLDPRO
A main supplier of solid tires for airport boarding bridges
Obtained safety and health management system certification
- 2013 Converted to Nexen Group's holding company
Established FTA origin certification system
- 2014 Obtained ISO 14001 certification
- 2015 Launched ALL-PRO HP
- 2019 Launched SOLDPRO700
- 2019 Completed Nexen Central Research Center

2000 A powerful challenge towards a wider world

- 2001 Acquired KNN Co., Ltd
- 2002 Changed company name to Nexen Co., Ltd.
- 2008 A main supplier of solid tires for port equipments

1960 A powerful movement for tomorrow

- 1968 Established Heung-ah Tire Industrial Co., Ltd.
- 1987 Produced solid tires for the first time in Korea

1990 Growth into a specialized automotive parts group

- 1990 A main supplier of completed forklift (OE) tires
- 1994 Obtained ISO 9001 certification
- 1997 Developed Non Marking tire
- 1999 Acquired Nexen Tire Co., Ltd.



A main supplier of 3 domestic OE companies

As a Korea's leading industrial tire company that is OE supplying to three global forklift manufacturers (Doosan Bobcat, Hyundai Xite Solutions, and Clark), we not only maintain our status as a company specializing in global forklift tires, but also continuously develop through continuous R&D with OE companies.



Port



Yard
Chassis



Reach
Stacker



Container
Handler

Airport



Boarding
Bridge



Airport
Dolly



Belt
Loader



Dock yard



Transporter



Excavator



mobile elevated
work platform



IT'S PERFECT SOLIDPRO700

The optimal tire solution for logistics transportation equipment
**STRONGER AND SMARTER
SOLID TIRE**

1 Increase performance and extend life

- New pattern NP01** Balanced performance and sophisticated curved design
- Increased life** Increased tire life through increased contact area and wear performance
- Improved RR performance** Preventing power loss and improving driving performance
- Increased block size** Reduced block deformation and abnormal wear
- Excellent load distribution** Stability specialized for transporting heavy objects

2 Solid tires resistant to vibration and shock

- Main Groove Angle** Minimized edge impact
- Contact surface distribution design** Reduced vibration/noise by distributing road surface and tire contact surface
- Improved block rigidity** Preventing distortion and chunking
- Chip & Cut** Suppressing Chip & Cut by minimizing crushing

3 Embrace both function and design

- Deepened groove** Improved Groove Depth & J-line
- Optimized shoulder design** A shoulder that resistant to high loads even with groove expansion
- Wear Indicator** Engraved 3-step indicator telling the remaining life (30%~50%, 80%)
- Stylish design** Dynamic Knurling Design

4 Smart volume design

- Side volume up** Improved durability through side volume up
- Bottom volume up** Preventing the deformation and responding stably to heavy objects
- Pressure uniformity up** Enhanced safety through stronger combination with the rim (wheel)



IT'S MORE POWERFUL

ALLPRO

ALLPRO, newly launched by Nexen, a renowned tire manufacturer
REINFORCED BLOCKS!
IMPROVED PERFORMANCE!

1 Stable Structural Design

3-layer structure and optimal shape design combines durability and ride comfort

2 Optimized Block Design & Groove Geometry Design

Optimized block rigidity and groove geometry design improve wear performance and prevent abnormal wear

3 Stylish Sidewall Design

Krnlung design with a modern feeling that matches the 3-step indicator engraving crossbar pattern to check the remaining life of Wear Indicator

4 Optimal Bottom Design

Improved durability of the bottom section with optimal design considering rim mountability and uniformity of rim pressure distribution



I T ' S S P E C I A L I Z E D
NEXEN POB

From small forklifts to special equipment, Nexen POB
STEEL BAND TIRE
FOR INDOOR

1 Perfect for indoor workshops

- High-performance Tread Comp'd and better wear performance indoors
- Optimized design for optimal steering and stability and contact pressure with the road surface
- Optimal drivability suitable for Low RR electric vehicles

2 Steel Band technology

- A standard steel band of international standards using standard Steel Band
- Dedicated design based on technology and experience to improve rim compatibility
- Application of unique anti-stain coating technology to prevent steel band stain

3 Various patterns and designs

Traction Pattern MTP, MS
Smooth Pattern PL, RIB



BRANDED BY NEXEN
KENEX

1 Optimal performance specialized for forklifts

- Traction Pattern: Strong traction and braking performance
- Premium Grip: Grip design to improve driving stability
- Optimized for high-load: Multi-carass structure suitable for high-load work
- Side band: Side design to absorb shock and prevent twisting

2 Increased productivity and reduced costs

- Improved fuel efficiency: Design to reduce rolling resistance reduces costs
- Comfortable ride comfort: The unique ride comfort unique to pneumatic tires improves workability
- Long Mileage: Excellent durability even in harsh working environments
- Preventing one-sided wear: Even wear performance prevents sudden decrease in life

A new standard for industrial tires
**A NEW STANDARD FOR
PNEUMATIC TIRE**
* GUARANTEED BY NEXEN

3 Tires selected by tire experts

- BRANDED BY NEXEN
- Nexen's one-stop service from inspection, shipment to follow-up management



LOT number

2411

24 : Produced in 24th week, **11** : Produced in 2011
Tires produced in the 24th week of 2011

Rim (wheel)


Rim size
We recommend using the indicated standard rim,

Tire size

Tire sizes may be indicated in inches or millimeters or in flat ratio like pneumatic tires.
Check the sizes listed in parallel in the size chart.


Marking country of origin

This is an indication of the tire producing country.
Since Nexen solid tires are entirely produced in Korea, You can check "MADE IN KOREA" in all products.

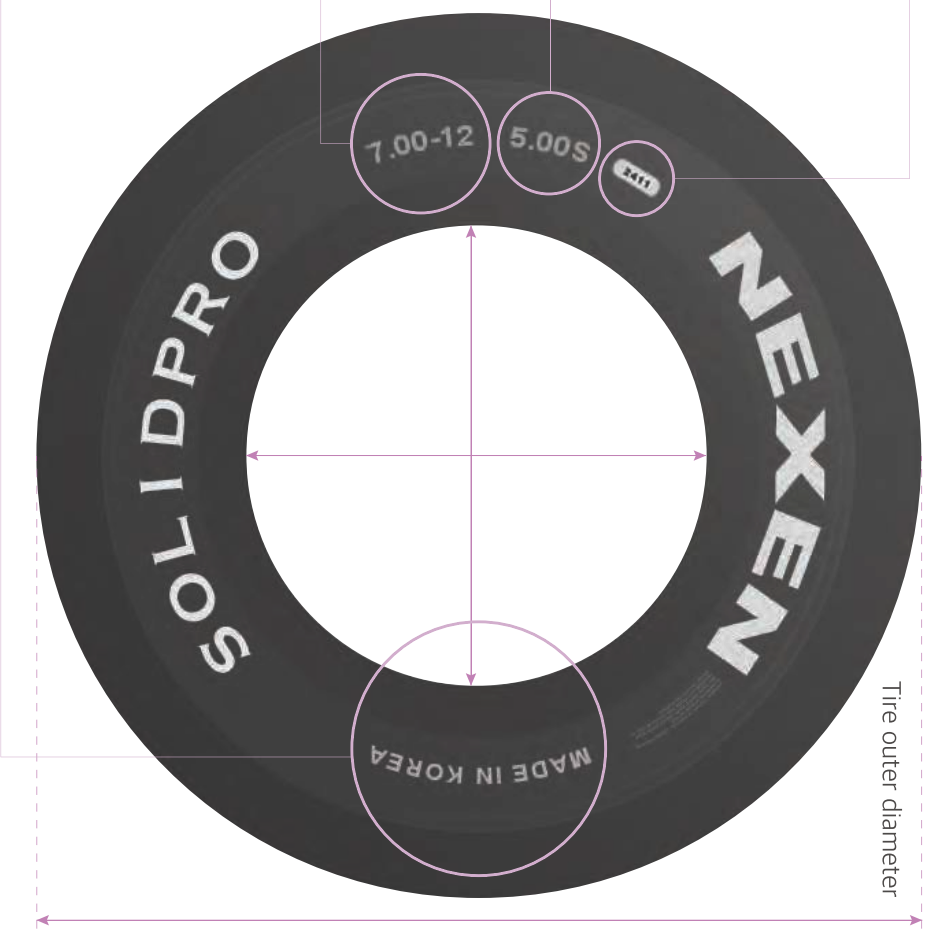

Tire outer diameter

Read tire size



Classification	Marking method	Example
Pneumatic shaped tire	B - d	7.00 - 12
Low profile tire	D X B - d	18 X 7 - 8
Trolley tire	D X B	23 X 5
Trailer tire	B - d	300 - 15



Marking method	Example
D X W X d (inch)	18 X 8 X 12 1/8
D X W - d (mm)	457 X 203 - 308

SOLIDPRO700

SOLIDPRO700 (NR01)

Tire size	Rim (wheel)	Easy fit diameter (mm)	Width (mm)	Maximum weight (kg)					Weight (kg)	
				Forklift front	Forklift rear wheels	Other vehicles ~5km/h	Other vehicles ~10km/h	Other vehicles ~25km/h		Stop 0km/h
4.00 - 8	3.00D	0	115	950	730	965	860	730	1100	11.5
	3.75I	-	115	950	730	965	860	730	1100	11.6
	3.00D	0	124	1415	1090	1440	1285	1090	1645	15.9
5.00 - 8	3.75I	-	124	1415	1090	1440	1285	1090	1645	16.3
	3.00D	0	113	1040	800	1055	945	800	1210	9.2
	4.33R	0	141	1495	1150	1520	1355	1150	1735	15.1
16 X 6 - 8 (150 / 75 - 8)	4.33R	0	163	2145	1650	2180	1945	1650	2490	21
	4.33R	0	163	2145	1650	2180	1945	1650	2490	21
	7.00E	0	209	2300	1900	2510	2240	1900	2870	29.3
9 inch	4.00E	0	130	1170	900	1190	1060	900	1360	9.9
	4.00E	0	141	1885	1450	1915	1710	1450	2190	25.8
	6.00E	0	185	2755	2120	2800	2500	2120	3200	33
10 inch	5.00F	0	171	2340	1800	2375	2125	1800	2720	35.8
	5.00F	-	171	2340	1800	2375	2125	1800	2720	36.2
	5.00F	0	191	3070	2360	3115	2785	2360	3565	51.2
7.50-10	5.50F	0	191	3070	2360	3115	2785	2360	3565	51.5
	6.50F	0	205	3445	2650	3500	3125	2650	4000	46.4
	5.00F	0	163	2405	1850	2440	2185	1850	2795	19.8
23 X 9 -10 (225 / 75 - 10)	6.50F	0	458	2470	1900	2510	2240	1900	2870	23.6
	5.00F	0	460	2405	1850	2440	2185	1850	2795	19.8
	6.50F	0	196	2470	1900	2510	2240	1900	2870	23.6
12 inch	5.00S	0	173	2910	2240	2955	2645	2240	3380	47.1
	8.00G	0	586	3770	2900	3830	3420	2900	4380	48.8
	8.00G	0	682	3900	3000	3960	3540	3000	4530	72.5
13 inch	10.00G	0	574	4485	3450	4555	4070	3450	5210	55.1
	3.75P	0	139	1495	1150	1520	1355	1150	1735	29.7
	4.50E	-	157	2365	1820	2400	2150	1820	2750	43.9
6.00 - 15	5.50	0	175	3545	2725	3595	3215	2725	4115	56
	6.00	0	175	3545	2725	3595	3215	2725	4115	56
	6.00	0	175	3545	2725	3595	3215	2725	4115	56



Tire size	Rim (wheel)	Easy fit diameter (mm)	Width (mm)	Maximum weight (kg)					Weight (kg)	
				Forklift front	Forklift rear wheels	Other vehicles ~5km/h	Other vehicles ~10km/h	Other vehicles ~25km/h		Stop 0km/h
15 inch	5.50	-	197	3900	3000	3960	3540	3000	4530	66.5
	6.00	-	197	3900	3000	3960	3540	3000	4530	67.3
	6.50	0	197	3900	3000	3960	3540	3000	4530	67.6
7.50 - 15	7.00	0	698	215	3900	3000	3960	3540	4530	58.8
	8.25 - 15	-	215	4615	3550	4685	4190	3550	5360	86.7
	6.50	0	814	215	4745	3650	4820	4305	3650	510
28 X 12.5 - 15 (355 / 45 - 15)	9.75	0	695	299	5525	4250	5610	5015	4250	81.4
	7.00	0	722	225	4745	3650	4820	4305	3650	510
	7.50	0	722	225	4745	3650	4820	4305	3650	510
250 - 15 (250 / 70 - 15)	8.00	0	820	259	5850	4500	5940	5310	4500	6795
	9.75	0	721	302	5690	4375	5775	5165	4375	6605
	9.75	0	816	300	7800	6000	7920	7080	6000	9060
400 / 60 - 15	11.00	0	817	329	8970	6900	9110	8140	6900	10420
	5.50	-	197	3965	3050	4025	3600	3050	4605	70.2
	6.00G5	0	197	3965	3050	4025	3600	3050	4605	70.6
7.50 - 16	10.00	0	825	310	8280	6900	8420	7520	6900	10420
	16.00	-	1024	461	10800	9000	10980	9810	9000	13590
	7.00	-	1000	229	5400	4500	5490	4905	4500	6795
9.00 - 20	8.00	-	1000	229	5400	4500	5490	4905	4500	6795
	7.00	-	1033	261	6000	5000	6100	5450	5000	7550
	7.50	-	1033	261	6000	5000	6100	5450	5000	7550
10.00 - 20	8.00	-	1033	261	6000	5000	6100	5450	5000	7550
	7.50	-	1075	273	6540	5450	6650	5940	5450	8230
	8.00	-	1075	273	6540	5450	6650	5940	5450	8230
11.00 - 20	8.00	-	1100	293	7560	6300	7685	6865	6300	9515
	8.50	-	1100	293	7560	6300	7685	6865	6300	9515
	10.00	-	1100	293	7800	6500	7930	7085	6500	9815
12.00 - 20	8.00	-	1200	293	8040	6700	8175	7305	6700	10115
	8.50	-	1200	293	8040	6700	8175	7305	6700	10115
	10.00	-	1200	293	9000	7500	9150	8175	7500	11325
14.00 - 24	10.00	-	1320	341	11100	9250	11285	10085	9250	13970
	8.00	-	1200	293	8040	6700	8175	7305	6700	10115
	8.50	-	1200	293	8040	6700	8175	7305	6700	10115

The maximum allowable weight when mounted on a forklift is based on a counter-balanced forklift truck, driving at a speed of 25 km/h or less.

ALLPRO

ALLPRO (GPP1)

IT'S MORE POWERFUL



Tire size	Rim (wheel)	Easy fit	Outer diameter (mm)	Width (mm)	Maximum weight (kg)				Weight (kg)			
					Forklift front	Forklift rear wheels	Other vehicles ~5km/h	Other vehicles ~10km/h		Stop 0km/h		
8 inch	5.00 - 8	3.00D	0	455	118	1415	1090	1440	1285	1090	1645	15.5
		3.75I	-	455	118	1415	1090	1440	1285	1090	1645	16
		3.00D	0	375	112	1040	800	1055	945	800	1210	8.9
9 inch	6.00 - 9	4.33R	0	415	138	1495	1150	1520	1355	1150	1735	14.6
		4.33R	0	450	148	1650	1245	1800	1520	1245	1945	19.2
		4.00E	0	526	137	1885	1450	1915	1710	1450	2190	24.9
10 inch	7.00 - 10	6.00E	0	519	182	2755	2120	2800	2500	2120	3200	32
		6.50F	0	581	202	3445	2650	3500	3125	2650	4000	44.9
		6.50F	0	454	196	2470	1900	2510	2240	1900	2870	23.2
12 inch	8.00G	8.00G	0	682	240	3900	3000	3960	3540	3000	4530	76
		5.00S	0	652	167	2910	2240	2955	2645	2240	3380	44.1
		8.00G	0	584	234	3770	2900	3830	3420	2900	4380	48.5
15 inch	6.00 - 15	4.50E	-	700	155	2365	1820	2400	2150	1820	2750	44.2
		5.50	0	728	174	3545	2725	3595	3215	2725	4115	54.5
		6.00	0	728	174	3545	2725	3595	3215	2725	4115	55.6
7.50 - 15	6.00	6.00	0	762	197	3900	3000	3960	3540	3000	4530	68.5
		6.00	0	762	197	3900	3000	3960	3540	3000	4530	68.8
		6.50	0	762	197	3900	3000	3960	3540	3000	4530	70
8.5 - 15 (28 X 9 - 15, 225 / 75 - 15)	7.00	7.00	0	694	210	3445	2650	3500	3125	2650	4000	56.8
		6.50	0	811	200	4745	3650	4820	4305	3650	5510	82.1
		9.75	0	721	310	5525	4250	5610	5015	4250	6420	92.9
28 X 12.5 - 15 (355 / 45 - 15)	9.75	9.75	0	818	299	6500	5000	6600	5900	5000	7550	126.5
		7.00	0	724	226	4745	3650	4820	4305	3650	5510	68.7
		7.50	0	725	226	4745	3650	4820	4305	3650	5510	70.2
300 - 15 (315 / 70 - 15)	8.00	8.00	0	815	250	5850	4500	5940	5310	4500	6795	104.8
		9.75	0	830	300	7800	6000	7920	7080	6000	9060	135.1
		7.50 - 16	6.00G5	0	782	190	3965	3050	4025	3600	3050	4605

The maximum allowable weight when mounted on a forklift is based on a counter-balanced forklift truck, driving at a speed of 25 km/h or less.

NEXEN POB

IT'S SPECIALIZED



Tire size	Outer diameter (mm)	Width (mm)	Maximum weight (kg)				Weight (kg)			
			~10km/h front	~10km/h rear wheels	~16km/h front	~16km/h rear wheels				
6 1/4 inch	254 X 102	102	785	645	701	589	570	468	561	8.7
		127	1030	840	915	770	745	610	730	7.8
		127	1010	830	905	760	735	605	725	7.1
7 1/8 inch	254 X 127	127	1010	830	905	760	735	605	725	7.1
		127	1010	830	905	760	735	605	725	7.1
		127	1010	830	905	760	735	605	725	7.1
7 1/4 inch	300 X 80	80	637	523	568	478	462	379	455	6.2
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
8 inch	343 X 140 - 203.2	140	1510	1240	1345	1130	1095	895	1080	12.9
		152	1560	1280	1380	1160	1120	920	1115	14.1
		152	1560	1280	1380	1160	1120	920	1115	14.1
10 inch	356 X 114 - 203.2	114	1170	960	1045	875	850	695	830	11.1
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
10 1/2 inch	406 X 127 - 266.7	127	1510	1240	1345	1130	1095	895	1080	13.4
		152	1560	1280	1380	1160	1120	920	1115	14.1
		152	1560	1280	1380	1160	1120	920	1115	14.1
11 1/4 inch	406 X 178 - 266.7	178	2325	1910	2070	1740	1685	1380	1660	22
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
12 1/8 inch	405 X 130 - 305	130	1510	1240	1350	1135	1095	900	1080	12.5
		127	1510	1240	1350	1135	1095	900	1080	12.5
		127	1510	1240	1350	1135	1095	900	1080	12.5
12 1/8 inch	432 X 127 - 308	127	1570	1290	1400	1180	1145	935	1120	14.7
		127	1570	1290	1400	1180	1145	935	1120	14.7
		127	1570	1290	1400	1180	1145	935	1120	14.7
16 1/4 X 7 X 11 1/4	413 X 178 - 285.8	178	2325	1910	2070	1740	1685	1380	1660	22
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
16 1/4 X 7 X 11 1/4	413 X 178 - 285.8	178	2325	1910	2070	1740	1685	1380	1660	22
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
16 1/8 inch	405 X 130 - 305	130	1510	1240	1350	1135	1095	900	1080	12.5
		127	1510	1240	1350	1135	1095	900	1080	12.5
		127	1510	1240	1350	1135	1095	900	1080	12.5
16 1/8 inch	432 X 127 - 308	127	1570	1290	1400	1180	1145	935	1120	14.7
		127	1570	1290	1400	1180	1145	935	1120	14.7
		127	1570	1290	1400	1180	1145	935	1120	14.7
18 X 8 X 12 1/8	457 X 152 - 308	152	2100	1720	1870	1575	1525	1250	1500	19.7
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
18 X 8 X 12 1/8	457 X 178 - 308	178	2550	2100	2280	1910	1855	1520	1820	23
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
18 X 8 X 12 1/8	457 X 203 - 308	203	3000	2475	2680	2250	2180	1790	2150	26.7
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
18 X 9 X 12 1/8	457 X 229 - 308	229	3450	2850	3090	2600	2510	2060	2475	30
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
21 X 7 X 15	533 X 178 - 381	178	2875	2350	2560	2150	2085	1710	2050	32.3
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
21 X 8 X 15	533 X 203 - 381	203	3375	2775	3025	2540	2455	2015	2425	35.7
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
21 X 9 X 15	533 X 229 - 381	229	3900	3200	3475	2920	2830	2230	2775	43.6
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
16 inch	508 X 203 - 406.4	203	3010	2470	2685	2255	2185	1790	2150	30.8
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
20 X 8 X 16	508 X 229 - 406.4	229	3445	2830	3075	2580	2500	2050	2460	34.3
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
22 X 8 X 16	559 X 203 - 406.4	203	3500	2875	3130	2625	2545	2085	2500	38.5
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
22 X 9 X 16	559 X 229 - 406.4	229	4050	3325	3600	3025	2930	2400	2875	42.6
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
16 1/8 inch	645 X 250 - 410	250	4810	3930	4180	3430	3400	2720	3125	72.4
		127	1335	1095	1195	1000	970	795	955	11.8
		127	1335	1095	1195	1000	970	795	955	11.8
20 inch	711 X 406 - 500	406	9735	8000	8695	7300	7055	5795	695	

I T ' S S P E C I A L I Z E D

NEXEN POB

Tire size Inch	mm	MTA	MS	PL	RIB	Outer diameter (mm)	Width (mm)	Maximum weight (kg)				Weight (kg)			
								-10km/h front	-10km/h rear wheel	-16km/h front	-16km/h rear wheel		-25km/h front	-25km/h rear wheel	-16km/h front
22 inch	28 X 12 X 22					711	305	6740	5540	6020	5060	4900	4015	4820	78.3
30 inch	40 X 16 X 30					1016	406	12420	10160	10810	8870	8550	7095	8060	152.8
Special Size (request)	1016 X 406 - 762														
	178X73					180	73	370	304	330	277	269	220	264	4-6
	204X76					204	76	439	361	392	329	319	261	314	7.5-7.9
	280 X 135					280	135	1236	1015	1103	927	897	736	883	9.6
	255 X 120					255	120	945	776	844	709	686	563	675	9.1
	305 X 152					305	152	1533	1259	1369	1150	1113	913	1095	13.5
	343 X 140					343	140	1479	1215	1321	1110	1074	881	1057	13.3
	380 X 165					380	165	2001	1644	1787	1501	1453	1191	1430	18
	382 X 142					382	142	1644	1350	1468	1233	1194	979	1174	16.6

PNEUMATIC TIRE

BRANDED BY NEXEN

KENEX

KENEX (Bias)



Tire size	PR	Rim (wheel)	Outer diameter (mm)	Width (mm)	Maximum weight (kg)				Air pressure	
					Forklift		Other vehicles		KPa	psi
					front	rear wheel	-10km/h	-25km/h		
8 inch										
5.00 - 8	10	3.50D	470	137	1150	970	-	-	1000	145
18 X 7 - 8 (180 / 70 - 8)	14	4.33R	465	173	1505	1270	-	-	970	141
	16	4.33R	465	173	1695	1450	1450	1055	1000	145
9 inch										
6.00 - 9	12	4.00E	540	160	1675	1415	1415	1045	1030	149
10 inch										
6.50 - 10	12	5.00F	590	175	1895	1600	-	-	1000	145
12 inch										
7.00 - 12	14	5.00S	676	190	2590	2190	2190	1610	1000	145
23 X 10 - 12 (250 / 60 - 12)	16	8.00G	597	254	3220	2720	2720	2005	970	141
15 inch										
7.00 - 15	14	5.5	750	200	3140	2655	2655	1955	1000	145
7.50 - 15	16	6	780	215	3550	2980	2975	2190	1000	145
8.15 - 15 (28 X 9 - 15, 225 / 75 - 15)	16	7	710	220	3115	2630	2630	1940	1000	145
8.25 - 15	14	6.5	840	235	3775	3185	3185	2350	830	120
	16	6.5	840	235	4050	3450	3450	2520	925	134
300 - 15 (315 / 70 - 15)	20	8	840	300	5940	4990	4990	3675	930	135
16 inch										
7.50 - 16	12	6.00G	805	215	3195	2700	2700	1990	790	115

The maximum allowable weight when mounted on a forklift is based on a counter balanced forklift truck, driving at a speed of 25 km/h or less.